



HOSHIZAKI




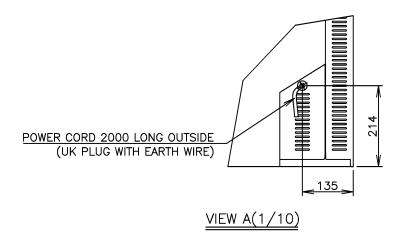


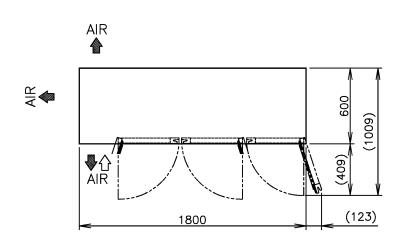

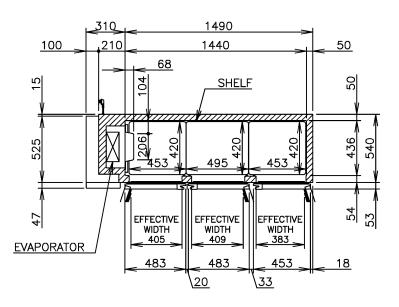

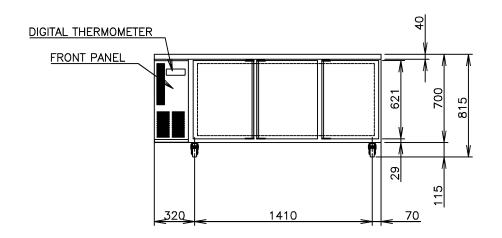





	ITEM	Hoshizaki Undercounter Freezer						
	MODEL	FT-186MA-A						
	POWER SUPPLY	1 Phase 220—240V 50Hz Capacity: 0.65kVA (2.98A)						
	AMPERAGE	Rated 2.7A						
Δ	ELECTRIC CONSUMPTION	357W Heater 397W Defrost 330W						
	HEAT REJECTION	*W						
	POWER CORD	2.0m (Plug with Earth Wire)						
	EFFECTIVE CAPACITY	401L						
	OUTSIDE DIMENSIONS	1800mm (W) x 600mm (D) x 815 mm (H)						
	INSIDE DIMENSIONS	1440mm (W) x 436mm (D) x 599mm (H)						
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom) ABS Plastic (Top & Bottom on Door)						
	INTERIOR	Stainless Steel, ABS Plastic (Door)						
	INSULATION	Polyurethane Foam						
	INSULATION FOAM BLOWING AGENT	Cyclopentane						
	REFRIGERATION SYSTEM	Forced Air Circulation						
	DEFROST SYSTEM	Glass Tube Heater						
	COMPRESSOR	Hermetic						
	CONDENSER	Fin and Tube type, Air—cooled						
	EVAPORATOR	Fin and Tube Type						
	REFRIGERANT	R404A						
	TEMPERATURE CONTROL	Microprocessor controlled Adjustable from -23 to -7° C						
	DEFROST CONTROL	Microprocessor controlled						
	ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire						
	COMPRESSOR PROTECTION	Motor Protector						
	CASTER	Urethane (76mm DIA,115mm HIGH)						
	SHELF	6pcs.						
	WEIGHT	Net: 93kg (Gross: Approx. 98kg)						
	PACKAGE	Carton 1865mm (W) x 680mm (D) x 790mm (H)						
	ACCESSORIES	_						
Δ	OPERATING CONDITIONS	Ambient Temperature: 5—38°C Voltage Range: Rated Voltage±6%						
	*We reserve the right t	o make changes in specifications and design without prior notice.						

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided.
- stated in the instruction manual provided.
 Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).

 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 230V 50Hz.
 The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.

 3. The cabinet temperature range of -23 to -7°C is guaranteed at ambient temperature of 35°C.

 4. Product code: T274-C400 (HLP)

APPRON NAGAS		CHECKED WANG		DESIGNED LIANG		AWN SCALE 1/		/30	TRIGONOMETRY	
LIUYIBO WX			$\overline{\mathbb{A}}$	2021.03.	21.03.22 DATE DATE 2019			DRAWING NO. D26806		SYMBOL
APPROVED	Proved Designe		SYMBOL	DATE			9.08.26			