



HOSHIZAKI

KM-40C HC

Crescent 41kg Ice Maker - Self Contained

Model Number
91000147




NATURAL
REFRIGERANT

PRODUCT FEATURES

- Individually shaped crescent ice.
- Protected by HoshiGuard Antimicrobial Agent.
- CycleSaver® technology includes a double-sided evaporator, uniquely crafted in stainless steel, which produces ice on both sides, resulting in more ice in less amount of time.
- EverCheck™ Control Board with audible alarm and diagnostic features, designed to assist service technicians in diagnosing problems.
- Accessible digital operation panel allows for easy identification of operation status and cause of faults.
- Automated cleaning function makes cleaning simple and saves time.
- Durable stainless-steel exterior.
- Easily removable & cleanable air filters on front panel.
- Accessories: Manual, Scoop, check valve, Hex Bolt legs and 150mm adjustable legs included (water filter and optional hex bolt legs sold separately)

TECHNICAL DRAWING

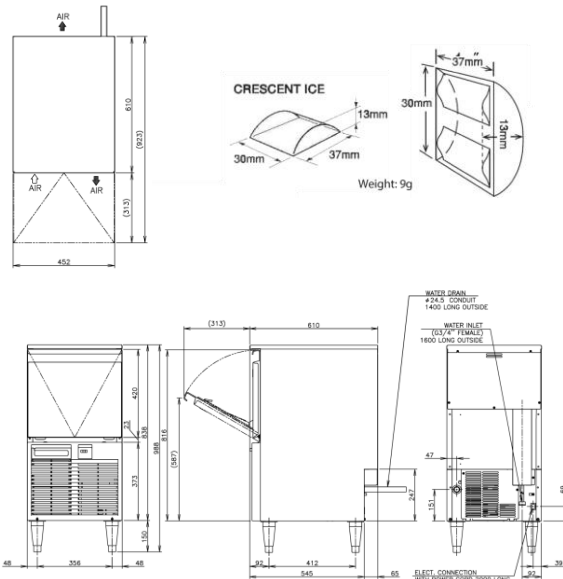

PRODUCT SPECIFICATION

Production Capacity / 24hrs	Approx. 41kg @ 21°C Air temp; 15°C Water Approx. 33kg @ 32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 16kg
Freeze Cycle Time	Approx. 23 Min (At 21°C Air ; 15°C Water)
Ice Production / cycle	Approx. 0.71kg/80pcs
Dimensions	452mm (W) x 610mm (D) x 988mm (H) (982-1005mm (H) with 150mm adjustable legs)(842mm (H) with hex bolt leg)
Cooling	Air
Weight Net/Gross (kg)	39/49
Refrigeration System	Forced Air Circulation
AC Supply Voltage	1 PHASE 220-240V 50Hz / 10amp Plug
Amperage	Running: 1.4A Starting: 7.7A
Refrigerant Charge	R290/68g
Operating Conditions:	
Ambient Temp	7-38°C
Water Supply Temp	7-32°C
Water Supply Pressure	0.07-0.8MPa (0.7-8bar)
Voltage Range	±6%
Electrical consumption	Rated Motor: 220W (Power Factor: 69%)
Water Consumption / 24hrs	Approx. 0.12m³/d(AT. 21°C ; WT 15°C)
GEMS Number	AIM0003



For free 6 month extended warranty, register online within 4 weeks of purchase date.
hoshizaki.com.au



INSTALLATION REQUIREMENTS

- Qualified plumber required for installation.
- Allow 15cm clearance at rear, sides and top for proper air circulation and ease of maintenance.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable s cations.

*Refer to manual for full installation & maintenance requirements.