




PRODUCT FEATURES


- New intelligent control circuit dedicated to saving power and water consumption.
- Produces individually made cubes which are crystal-clear and slow melting.
- Unique closed cell water circuit for ultimate contamination protection.
- Auto rinse and flush cycle.
- Micro computer controller controls ice making process to work at peak performance in any conditions.
- Easily removable and cleanable air filters on front panel.
- Inbuilt safety features – freeze cycle back up timer, defrost back up, low voltage and high amp protector.
- Durable stainless-steel exterior.
- Can be stacked and combined with modular bins and bases
- Smart plug-and-play design comes complete with ice chute for an easy and quick setup




TECHNICAL DRAWING



IM-240 DNE - Basic model with top panel
IM-240 XNE - Stackable model without top panel and with ice funnel
IM-240 XNE - Stackable model without top panel and with ice funnel



Large

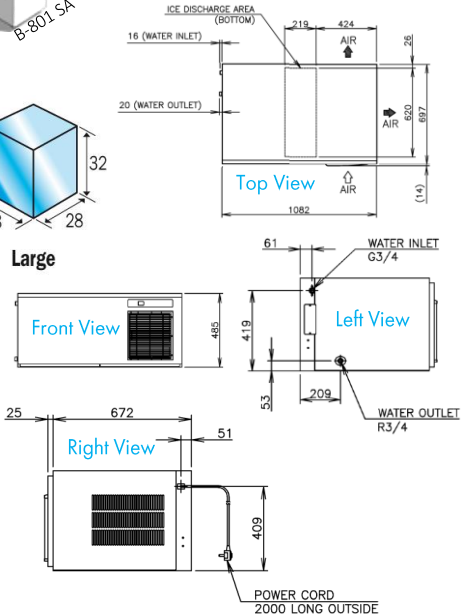

PRODUCT SPECIFICATION

Production Capacity / 24hrs	Approx. 205kg @ 21°C Air temp; 15°C Water Approx. 160kg @ 32°C Air temp; 21°C Water
Recommended Storage Bins	B-801 SA B-1300 SS B-1500 SS
Freeze Cycle Time	Approx. 19 Min (At. 21°C Air ; 15°C Water)
Ice Production / cycle	Approx. 3.2kg / 140pcs
Dimensions	1,084mm (W) x 700mm (D) x 500mm (H)
Cooling	Air
Weight Net/Gross (kg)	84/98
Refrigeration System	Forced Air Circulation
AC Supply Voltage	1 PHASE 220-240V 50Hz/ 10amp Plug
Amperage	Running: 6.6A
Refrigerant Charge	R404A/480g
Operating Conditions:	
Ambient Temp	1-40°C
Water Supply Temp	5-35°C
Water Supply Pressure	0.07-0.8MPa (0.7-8bar)
Voltage Range	±6%
Electrical consumption	Rated Motor: 1,330W (Power Factor: 83%)
Water Consumption / 24hrs	Approx. 0.47m³/d(AT. 21°C ; WT 15°C)
Compatible Water Filter	HLF20 Filter System (sold separately)

INSTALLATION REQUIREMENTS

- Qualified plumber required for installation.
- Included accessories & fittings pack can be found behind front panel.
- Allow 30cm clearance at top/rear, 15cm left and 50cm right for proper air circulation and ease of maintenance.
- Install bin control switch according to installation manual.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications

*Refer to manual for full installation & maintenance requirements.



For free 6 month extended warranty, register online within 4 weeks of purchase date.
hoshizaki.com.au

